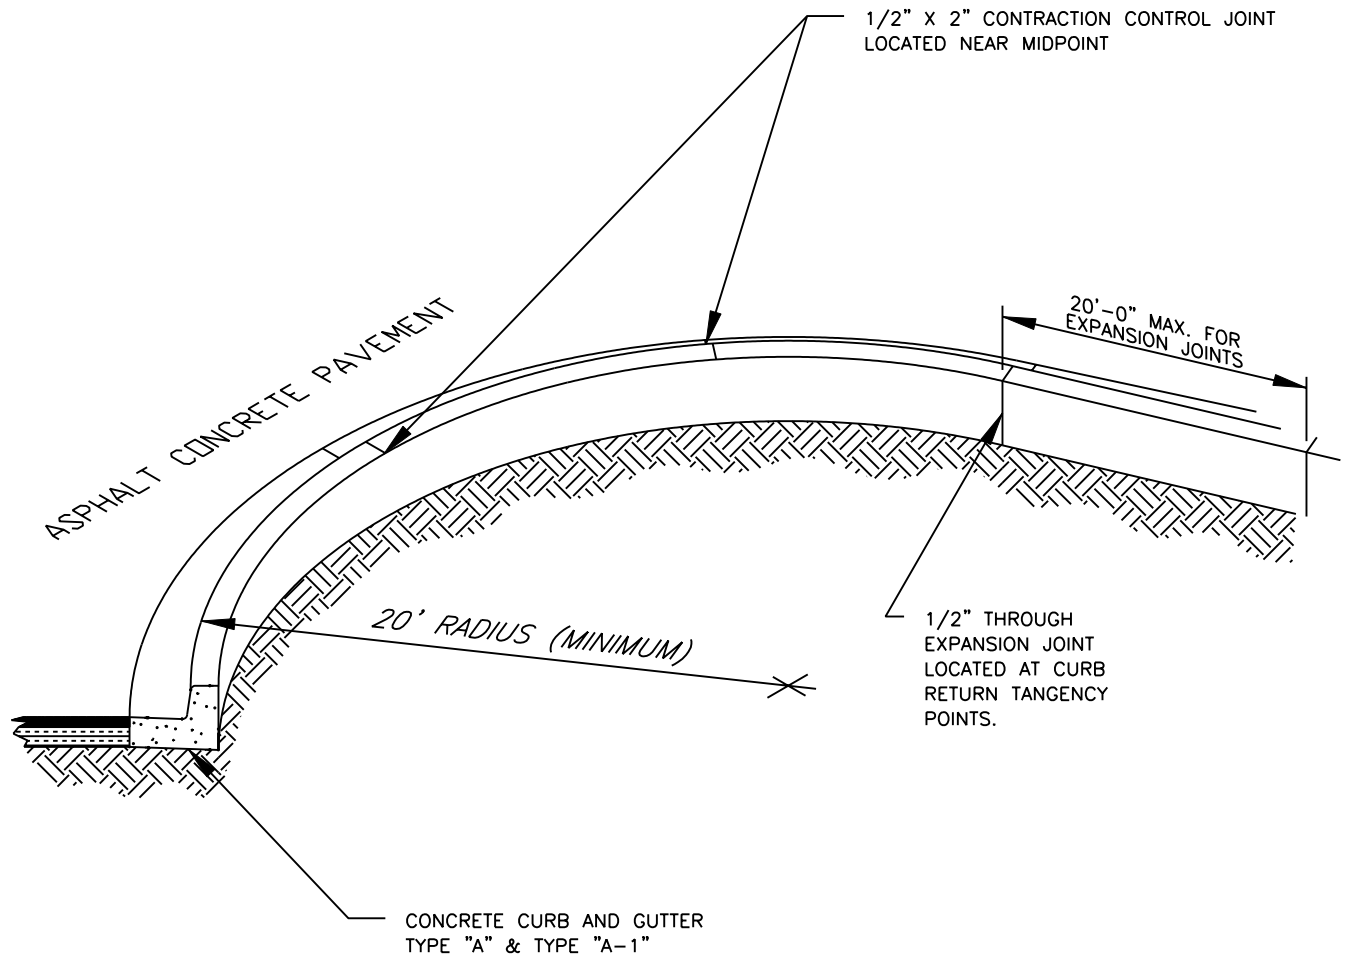


CURB RETURN DRIVEWAY

NOTES:

JOINTS - AS SHOWN OR AS DIRECTED BY ENGINEER. THROUGH JOINTS IN CURB AND GUTTER SHALL MATCH SIDEWALK THROUGH JOINTS.

MATERIALS - CONCRETE SHALL BE AIR ENTRAINED CLASS 3000

* 25 FOOT RADIUS REQUIRED FOR DRIVEWAY WIDTHS LESS THAN 28 FEET.

APPROVED: RICHARD H. BARTHOL

REV. DATE: JULY 1, 2000

ENGINEERING DIVISION



STANDARD DETAILS

CURB RETURN DRIVEWAY

FILE SD908.DWG DRAWING NO. **308**